


Z Series

Heavy Duty Cylindrical Lever Lock

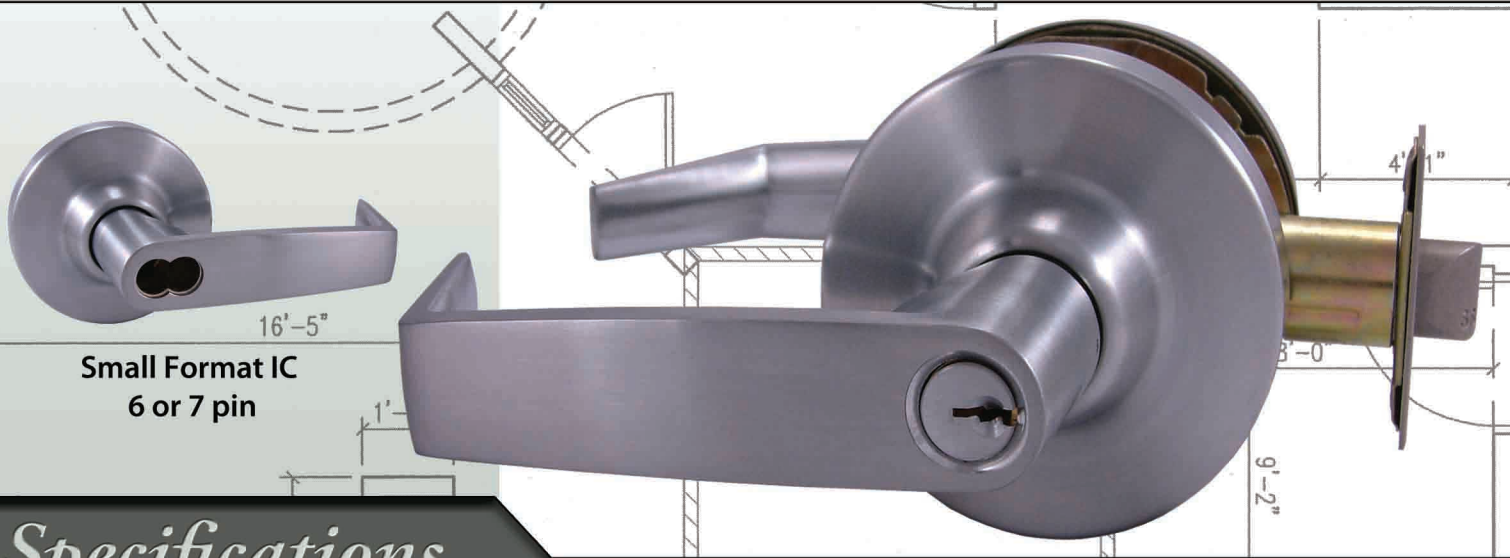

Specifications

- ANSI :** Meets & Exceeds ANSI - A156.2, Series 4000, Grade 1 Standards
- UL Listings :** UL Listed for "A" Label 3 Hour Fire Doors
- ADA Compliance :** Meets ADA and ANSI A117.1 accessibility codes
- Cycle Testing :** Tested to over 2 Million Cycles
- Lock Chassis :** Steel, Zinc dichromated for Corrosion Resistance
- Clutching :** Clutching levers standard for Vandal resistance on locking functions
- Trim :** 5" Solid zinc diecast levers, 3 1/2" wrought brass roses
- Lever Return:** Independent lever return springs to prevent lever sag
- Handing :** Non-Handed - Completely reversible
- Backset & Latchface :** 2 3/4" backset std. with 1 1/8" x 2 1/4" latchface, 2 3/8" backset is available with 1" x 2 1/4" latchface both with self adjusting front for square or beveled edge doors
- Latchbolt :** Stainless Steel with 1/2" projection, Deadlocking on keyed functions
- Cylinder Options :** 6 Pin Brass, C Kwy, with 2 Keys std, Prepared for Small format IC core (less core)
- Optional Keyways :** 11 popular competitor keyways available with replacement cylinders
- Strikes :** 4 7/8" x 1 1/4" ASA standard - T strike & Full lip strikes available
- Door Preparation :** ANSI A115.2 - 2 1/8" crossbore with (2) 5/16" Thru bolt holes
- Door Thickness :** Factory Set for 1 3/4" - can be adjusted to fit 1 3/8" to 2" thick doors
- Lever Designs :** Flat (standard, shown above), & Curved
- Standard Finishes :** US26D
- Special Order Finishes:** US3 PVD*, US4, US10B, US15, US26 PVD* (PVD = Lifetime Finish)
- Fasteners :** Combination screws for wood or metal doors & frames
- Warranty:** Limited Lifetime Warranty

