


Asico Wood Fire Door Technical Specifications:

Label:	Eoxva BM TRADA Q-Mark
Thickness:	45mm - 57mm
Maximum size:	Single: 4'0" x 8'0" (1219 x 2438mm) Double: 8'0" x 8'0" (2438 x 2438mm)
Lipping:	Hardwood 8.0mm
Faces :	Based on plywood, MDF, HDF, or hardboard decking with different finished options: natural veneer,HPL,PVC,etc.
Adhesives:	Doors constructed using water-resistant adhesives.
Lites frame:	Larger lite available with glazing. UL lite frame ID:R38990
Louvers:	Up to 24" x 24" (610 x 610mm). Louver(s) allowed in doors with lite openings, exit devices or smoke control doors.Positive Pressure:Singles and pairs require a category B edge seal.
Intumescent:	SG fire intumescent / smoke seals.

Wooden Fire Door Structure

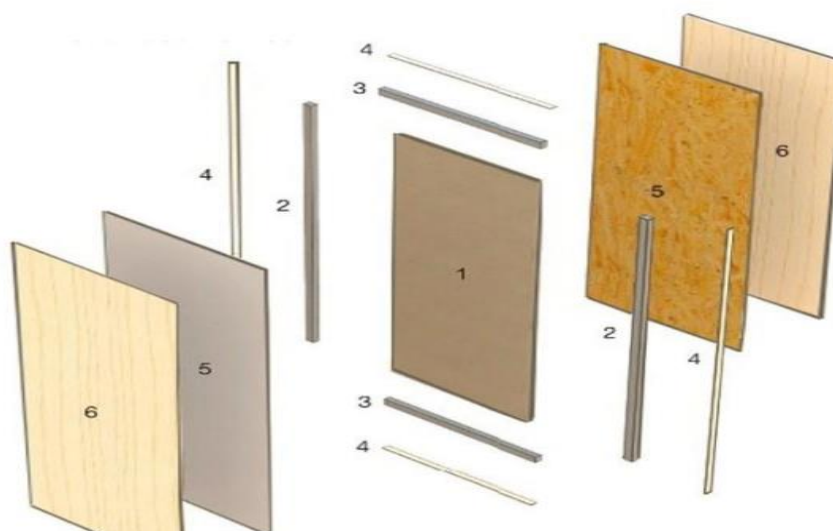

Keys

- 1 Door Core
- 2 Hardwood stile
- 3 Hardwood rail
- 4 Hardwood lipping
- 5 Lining layer
- 6 Finishing

